



TECHNICAL SPECIFICATION

KUUL POWERGT EVAPORATIVE MEDIA

7MM 45/15


If you need high performance for gas turbines, **Kuul PowerGT™** is an ideal technology with high air-speed performance.

Kuul PowerGT media is designed to withstand the demands of even the toughest HVAC environment. Due to its unique material composition, **PowerGT** has market-leading water absorption properties and saturation efficiency, which allows the product to rapidly respond to fast start-up conditions and changes in demand. This media is designed for strong, durable, long-lasting performance, while providing you

with the superior strength that is synonymous with **Kuul®** evaporative media.

Kuul evaporative media provides enhanced cooling performance and reduced pressure drop due to the choice of materials, design process and proprietary manufacturing technique. Only the highest quality materials are used and all components of this line are manufactured in our United States manufacturing facility.

KUUL POWERGT EVAPORATIVE MEDIA 7mm 45/15 EVAPORATION EFFICIENCY AND PRESSURE DROP

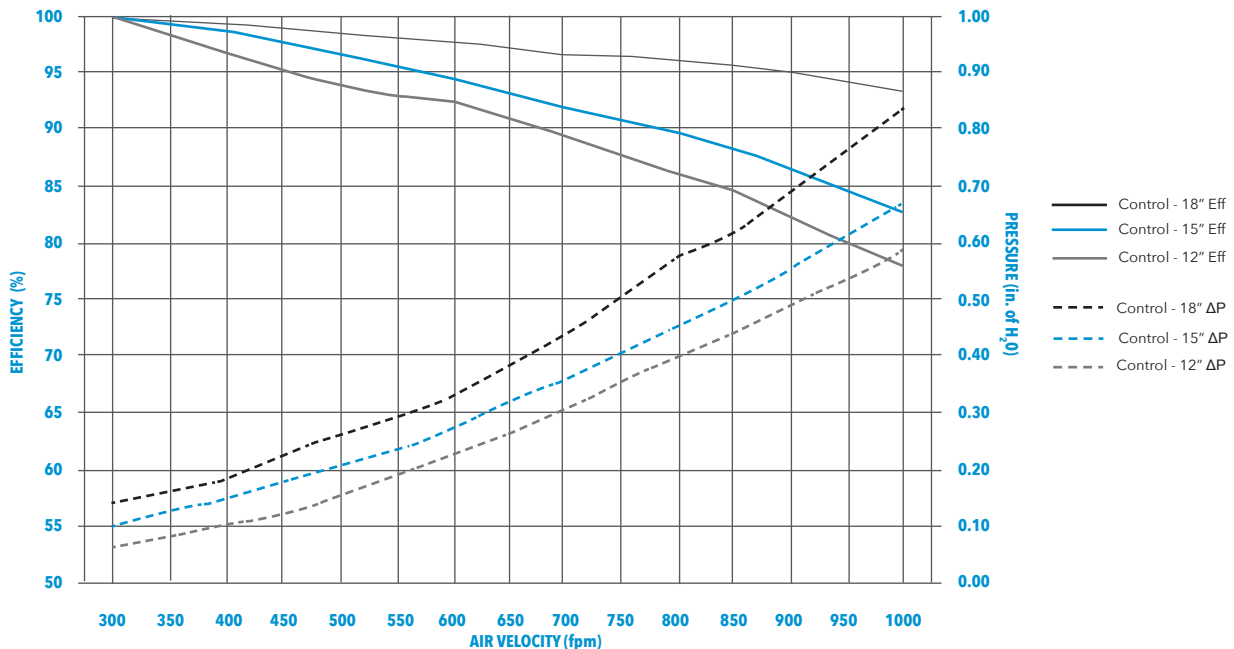

- The performance data shown above is independently tested and verified by a third party under required, stringent testing conditions.
- Due to external factors including, but not limited to, installation practices, maintenance practices, water quality, humidity and ambient temperature, results may vary.
- The performance data shown above is based on wet media in optimal environmental conditions.

To Learn More, Visit

www.thekuuleffect.com

Condair Group AG
Gwattstrasse 17, 8808 Pfäffikon SZ, Switzerland
Phone +41 55 416 61 11, Fax +41 55 588 00 07
www.condairgroup.com



TECHNICAL SPECIFICATIONS AND DESIGN INFORMATION

Please refer to the table below for information surrounding design and final installation requirements.

| | | | |
|---|------------------------|---|------------------|
| Density of media | [lbs/ft ³] | dry media = 1.38 | wet media = 3.34 |
| Water carrying capacity from dry to wet | [gal/ft ³] | 0.235 | |
| Maximum air velocity of media before carry-over | [fpm] | 750 | |
| Maximum air velocity of media using DE | [fpm] | 1,000 (If greater consult Kuul Support) | |
| Maximum height of a single piece of media | [in “] | 78 | |
| Maximum system height per single header | [in “] | 120 (If greater consult Kuul Support) | |

- For system design advice, please contact Kuul Technical Support for optimum choice
- Kuul offers design consultations to maximize your chosen system configuration

MAINTENANCE AND UPKEEP

This product has been designed with superior wet strength and chemical stability. The following recommendations pertain to the choice of water chemistry to be used.

| PHYSICAL AND CHEMICAL PARAMETERS | |
|---|--|
| Parameter | Guideline (unless otherwise agreed) |
| Total alkalinity (ppm CaCO ₂) | Less than 500ppm with pH less than 6.8. Please consult Kuul Support for advice with scale prevention with values higher than 200ppm. |
| Chlorine (ppm Cl ₂) | Less than 5 ppm |
| Sulphate (ppm SO ₄) | Range as recommended by the cleaning specialist in their method statement |
| Conductivity (mS/m) | Less than 100mS/m recommended for scale control |
| Total dissolved solids (gravimetric) (ppm) | Less than 900ppm |
| Suspended solids (ppm) | Less than 20ppm |
| pH as recommended safe range | 6.5 to 8.5 to prevent damage to media chemistry |
| Soluble Iron (ppm) | Less than 3 ppm |
| Total copper (ppm) | Less than 1 ppm to prevent corrosion |
| Hygiene, Bacteria Control | |
| Sodium Hypochlorite (ppm) | Disinfectant and sterilizer range between 0.5-2.0 ppm |
| Note: It is recommended to obtain a water analysis to ascertain the scale formation potential. | |
| Note: It is not recommended to use RO or DI water in aggressive concentrations. Please request guidance from Kuul Support | |
| Please refer to Kuul Cellulose Maintenance and Service Guide for more information. | |

Updated June 2024

For system design advice, please contact Kuul Support for optimum choice. Condair is devoted to sourcing superior materials and manufacturing with the highest quality standards as well as ongoing product development. For current performance data, contact your **Kuul**[®] evaporative media expert.



To Learn More, Visit

www.thekuuleffect.com